

power.com XC

Valve regulated lead-acid batteries



Motive Power Systems

Reserve Power Systems

Special Power Systems

Service

Your benefits with HOPPECKE power.com XC

- **Maintenance-free regarding water refilling** - due to Absorbent Glass Mat-technology
- **Excellent high-current capability** - low investment costs due to innovative electrode structure
- **Optimal space utilization** - due to horizontal arrangement and stacking
- **Optimum operational safety** - integrated backfire protection and central degassing system
- **Higher short-circuit safety even during the installation** - based on HOPPECKE system connectors
- **Easy assembly and installation** - battery lid with integral handle

Typical applications of HOPPECKE power.com XC

- **Uninterruptible power supply (UPS)**
- **Telecommunications**
Mobile phone stations
BTS-stations
Off-grid/on-grid solutions
- **Power supply systems**
- **Emergency lighting**



Similar to the illustration





POWER FROM INNOVATION

Type overview

Capacities, dimensions and weights

Type	C ₁₀ /1.80 V Ah	C ₅ /1.77 V Ah	C ₃ /1.75 V Ah	C ₁ /1.70 V Ah	C _{1/2} /1.65 V Ah	C _{1/6} /1.60 V Ah	Weight kg	Length L mm	Width W mm	Height H mm	Fig.
power.com XC 121300	43.8	40.6	38.4	31.1	27.4	20.3	22.1	229	177	230	A
power.com XC 121700	57.5	54.1	51.6	41.6	36.6	27.2	22.7	229	177	230	A
power.com XC 122100	61.5	58.3	56.0	50.0	45.4	33.9	25.3	229	177	230	A
power.com XC 122600	80.5	73.9	69.6	60.1	54.6	40.6	37.1	344	177	230	B
power.com XC 123000	93.2	86.2	81.2	70.1	63.6	47.5	37.7	344	177	230	B
power.com XC 123400	98.6	93.3	89.4	80.1	72.6	54.2	38.4	344	177	230	B
power.com XC 124100	134.2	117.0	110.2	95.1	86.4	64.5	50.7	498	177	230	C
power.com XC 124400	139.2	126.0	118.9	103.7	94.0	70.2	54.2	498	177	230	C
power.com XC 125100	152.1	143.7	136.6	117.7	107.1	80.0	55.9	498	177	230	C
power.com XC 21100	225.0	214.5	200.4	169.5	145.2	106.4	13.2	88.5	181	310	D
power.com XC 21600	338.0	321.5	302.7	254.9	218.1	151.6	19.8	181	127	310	E

C₁₀, C₅, C₃, C₁, C_{1/2} and C_{1/6} = Capacity at 10 h, 5 h, 3 h, 1 h, 1/2 h and 1/6 h discharge

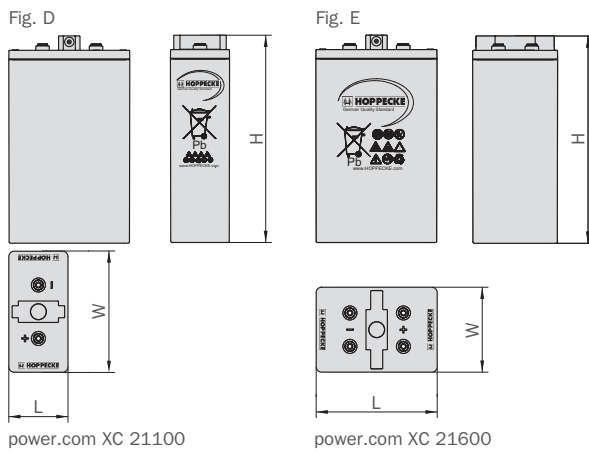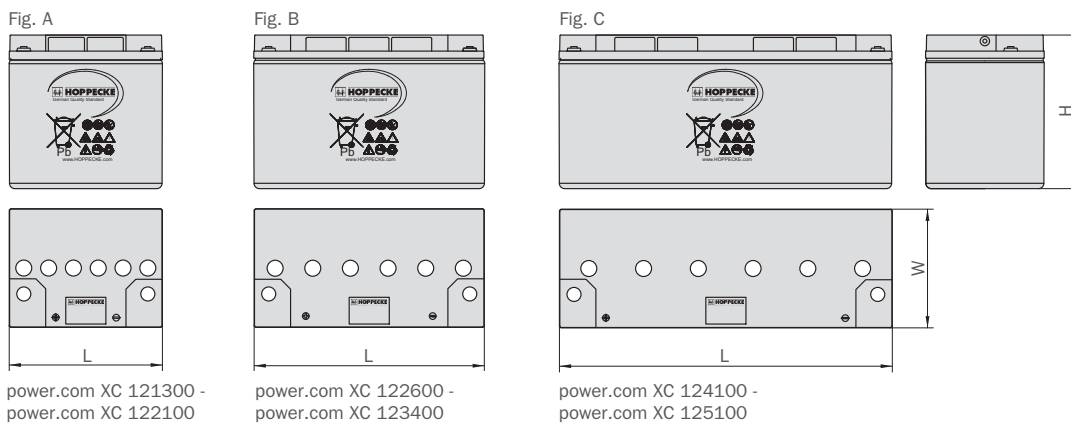

Design life: 10-12 years (according to EUROBAT)

Optimal environmental compatibility - closed loop for recovery of materials in an accredited recycling system